

Technical Information

Rev. 3, June 2005



Kalrez[®] perfluoroelastomer
parts

From DuPont Performance Elastomers

Kalrez[®] Spectrum[™] 7075

Product Overview

Kalrez[®] perfluoroelastomer parts have been the material of choice for mechanical seals, valves and other demanding chemical and hydrocarbon processing applications for over 25 years. Today, mechanical seals are becoming smaller and lighter, yet are required to perform just as efficiently as larger mechanical seals. This puts additional demands on elastomeric O-rings as their cross section decreases to accommodate the smaller design. Smaller O-rings are more prone to compression set which can reduce their functional effectiveness, and therefore reduce the operability of the mechanical seal.

With more expected from mechanical seals and their sealing components, DuPont Performance Elastomers (DPE) has developed a product with improved sealing properties. Kalrez[®] Spectrum[™] 7075 expands on the capabilities of Kalrez[®] 4079 by offering much lower compression set, increased seal force retention, broader chemical resistance and higher temperature stability. 7075 is the latest product from DPE to meet the demanding requirements in new mechanical seal applications.

Kalrez[®] Spectrum[™] 7075

Kalrez[®] Spectrum[™] 7075 joins the family of Kalrez[®] Spectrum[™] products designed for the chemical processing industry. Compound 7075 broadens the family of Spectrum[™] sealing options with enhanced physical performance properties including very low compression set (*Figure 1*) and improved seal force retention (*Figure 2*). To provide even greater sealing performance in dynamic applications where low friction is required, 7075 O-rings have a glossier finish than other Kalrez[®] parts.

Kalrez[®] Spectrum[™] 7075 is designed for general-purpose use as an O-ring or custom-sealing component in the chemical and hydrocarbon processing industries. It is a carbon-black filled compound with mechanical properties designed for improving sealing performance in temperature cycling applications. 7075 has improved thermal resistance that extends maximum service temperature to 327°C. It is recommended that in each application the chemicals, service temperature and pressure be reviewed for the optimal compound selection.

Thermal, Chemical, and Mechanical Performance

Kalrez[®] Spectrum[™] 7075 offers very low compression set (*Figure 1*) as measured by ASTM (American Society of Test Methods) D395 to predict heat resistance. DuPont Performance Elastomers and Kalrez[®] compression set testing extends the standard ASTM 70 hr protocol to include 336 and 672-hr compression set testing, which better predicts long-term O-ring performance. Kalrez[®] 4079, the standard in the sealing industry for severe service, now has a sister compound with nearly 50% less compression set. Less compression set results in improved sealing and longer service life. This feature augments the requirements of the sealing industry as smaller and lighter mechanical seals with reduced spring force tension dominant in the market.

Kalrez[®] Spectrum[™] 7075 offers the enhanced elastomeric properties outlined above while providing chemical resistance better than the industry standard set by Kalrez[®] 4079.

Typical Physical Properties[†]

Color	Black
Hardness ² , Shore A	75
100% Modulus ³ , MPa (psi)	7.58 (1100)
Tensile at Break ³ , MPa (psi)	17.91 (2600)
Elongation at Break ³ , %	160
Compression Set, %	
70 hr at 204°C (400°F) ⁴	12
70 hr at 204°C (400°F) ⁵	15
Maximum Service Temperature ⁶ , °C (°F)	327 (620)

[†] Not to be used for specifications

² ASTM D2240 (pellet test specimens)

³ ASTM D412 (dumbbell test specimens)


⁴ ASTM D395B, (pellet test specimens)

⁵ ASTM D395 (AS568 K214 O-ring test specimens)

⁶ DuPont Performance Elastomers proprietary test method


The seal force retention (*Figure 2*) of Kalrez® Spectrum™ 7075 is about 10% improved over Kalrez® 4079. Improved seal force retention equates to better elastomeric properties at service temperature and pressure leading to reliable, long-term mechanical seal performance.

Figure 1. Compression Set at 204°C*

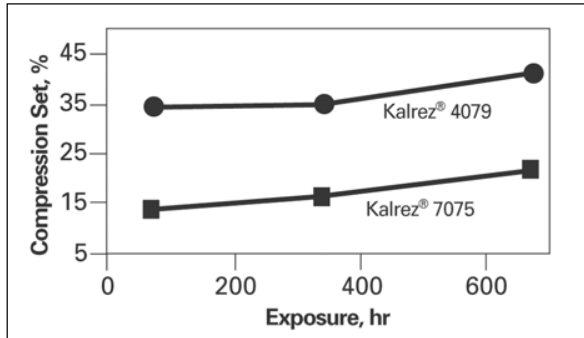

*ASTM D395B 214 O-ring

Figure 2. Seal Force Retention at 200°C*

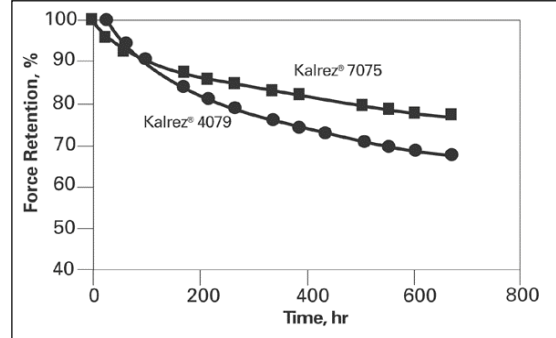

*ISO 3384: 1991, Method A, 214 O-ring

Table 2

Chemical Resistance to:	Kalrez® 7075	Kalrez® 4079	Kalrez® 6375
Aromatic/Aliphatic Oils	++++	++++	++++
Acids	++++	++++	++++
Bases	+++	+++	++++
Alcohols	++++	++++	++++
Aldehydes	++++	+++	++++
Amines	++	+	++++
Ethers	++++	++++	++++
Esters	++++	++++	++++
Ketones	++++	++++	++++
Steam/Hot Water	++	+	++++
Strong Oxidizers	++	++	++
Ethylene Oxide	+++	X	++++
Hot Air	++++	++++	+++

++++ = Excellent +++ = Very Good ++ = Good + = Fair X = Not Recommended

For further information please contact one of the addresses below, or visit us at our website at www.dupontelastomers.com/kalrez

Global Headquarters — Wilmington, DE USA
 Tel. +1-800-853-5515
 +1-302-792-4000
 Fax +1-302-792-4450

European Headquarters — Geneva
 Tel. +41-22-717-4000
 Fax +41-22-717-4001

South & Central America Headquarters — Brazil
 Tel. +55-11-4166-8978
 Fax +55-11-4166-8989

Asia Pacific Headquarters — Singapore
 Tel. +65-6275-9383
 Fax +65-6275-9395

Japan Headquarters — Tokyo
 Tel. +81-3-6402-6300
 Fax +81-3-6402-6301

The information set forth herein is furnished free of charge and is based on technical data that DuPont Performance Elastomers believes to be reliable. It is intended for use by persons having technical skill, at their own discretion and risk. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside of our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any material, evaluation of any compound under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on any patents. While the information presented here is accurate at the time of publication, specifications can change. Check www.dupontelastomers.com for the most up-to-date information.

CAUTION: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont Performance Elastomers customer service representative and read Medical Caution Statement H-69237.

DuPont™ is a trademark of DuPont and its affiliates.

Kalrez® and Kalrez® Spectrum™ are trademarks or registered trademarks of DuPont Performance Elastomers.

Copyright © 2005 DuPont Performance Elastomers. All Rights Reserved.